

Technical Specifications

Built / Ship Yard	2020 / Saiki
Flag	Marshall Islands
Class	Rina
P&I Club	UK Club
Type	Bulk Carrier / Open Hatch Super Box
Dwt	41,500 mts on 11,467 m Summer Draft
Tpc	48,67 mt on Summer Draft
L.o.a	179,90 m
Beam	30,00 m
Light Ship	9042 mt
Moulded Depth	16,00 m
Tonnage Gt / Nt	25,427/ 13,716



	Summer	Winter	Tropical
Deadweight	41,500 mts	40,342 mts	42,656 mts
Draft	11,467 m	11,229 m	11,705 m
Freeboard	4,594 m	4,832 m	4,356 m

Hatch Cover No	1	2	3	4	5
Hatch Cover Size	14,40 x 18,70 m	20,00 x 25,4 m	20,00 x 25,4 m	20,00 x 25,4 m	22,40 x 24,0 m
Tank Top dimensions (Fwd X Aftx X Length)	11,15 x 18,65 x 22,35 m	25,30 x 25,40 x 27,9 m	25,30 x 25,40 x 27,9 m	25,30 x 25,40 x 27,9 m	25,40 x 11,10 x 27,15 m
Hold Capacity	1	2	3	4	5
Grain / Bale (Cub.m)	6.398,90 / 6.290,50	11.308,80 / 11.131,50	11.362,20 / 11.185,00	11.335,40 / 11.152,60	10.463,50 / 10.314,50

Total

Type of Hatch Cover	Hydraulic Folding Type
Gear	4 Cranes x 36,0 mts SWL
Grab	2 X 12 cbm (Remote Control)
Ventilation/A60/CO2/ITF	Mac / Yes / Yes / Yes
Tanktop Strength	30 mts / sqm
Hatch Cover Strength	H1:2.52, H2:2.96, H3:3.07, H4:3.07, H5:3.07 mts/sqm
Main Engine	MITSUI-B&W 6S50ME-C8, 9449 AT 110 RPM (ELECTRONIC)
Generators:	Yanmar x 3 Set
Bunker Capacity %85	HS - LS ifo : 1166,0 m3 & Lsmgo : 321,30 m3

Speed / Consumption

Laden Condition	Abt 12,00 Knots on abt 16,50 mt VLSIFO/HSFO + 0,1mt LSMGO/HSFO
Ballast Condition	Abt 12,50 Knots on abt 16,50 mt VLSIFO/HSFO + 0,1mt LSMGO/HSFO
Port Consumption	Abt 2,85 mts VLSIFO + 0,1 mt LSMGO
Winches Working	Abt 5,60mts VLSIFO+ 0,1 mt LSMGO







DEVBULK DENİZ





DEVBULK

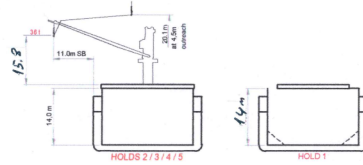

SIDE VIEW

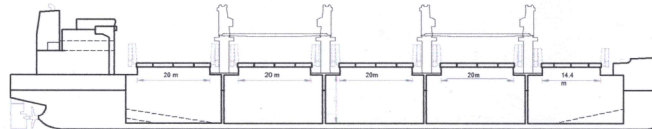

MAIN DECK

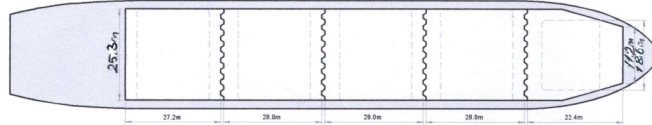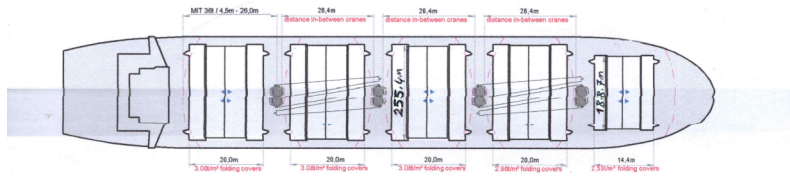

HOLDS & DOUBLE BOTTOM

